




Specification:

- Accuracy class: III , n=30003
- AD converting speed: 10 times/sec
- Input single range: 0 ~ 19.5mv
- Excitation circuit: 5 VDC, 4 wire connection
4 load cell of 350 Ω
- Max division: 15,000d
- Communication: RS232
- Power: 6V / 4Ah rechargeable battery or 9VDC Adapter
- Operation temperature: -10 ~ 40°C
- Operation humidity: $\leq 85\%$

Features & Benefits:


- 6 digits – 0.8" LED display
- Stainless steel enclosure
- Key: On/ Off, Total, Tare, Zero, Set
- Drive up to four 350 Ω load cell
- Automatic power off
- Low-battery remind

✓ Functions

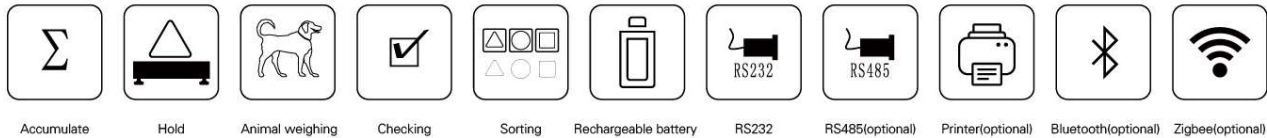

✓ Dimensions

- Unit (mm)

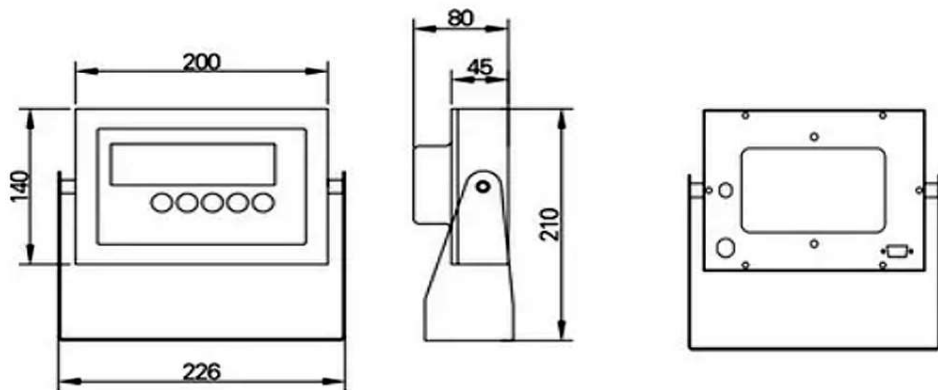

European standard product
Manufactured in China

Manufacturer

LOCOSC NINGBO PRECISION TECHNOLOGY CO., LTD