



MK236

✓ Technical specifications

- ◆ Display: 6-digit LED
- ◆ Accuracy class: OIML Ⅲ
- ◆ AD convert: Σ - Δ , 24 bit
- ◆ Input voltage: 6mV~19.5mV
- ◆ Resolving: display 15,000, internal code 1,000,000
- ◆ Load cell Interface: 1~4 350 Ω analog load cell(s)
- ◆ Power supply: AC110/220V 50/60Hz
or built-in 6V/4Ah battery
- ◆ Work temperature: -10°C ~+40°C
- ◆ Humidity: \leq 85%RH


✓ Options

- ◆ Second display interface: serial RS232
- ◆ Communication interface: RS232/RS485,
baud rate 600/1,200/2,400/4,800/9,600
- ◆ Printing interface: shared with serial interface, can be connected
to serial printer (optional: desktop printer)
- ◆ Bluetooth

✓ Applications

- ◆ Electronic floor scale, bench scale, logistics scale, pet
scale, load cells, etc.


✓ Functions

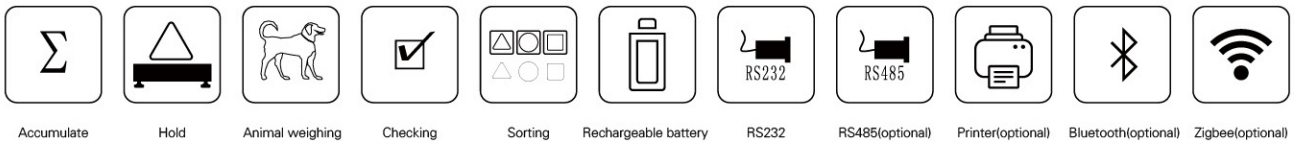

Accumulate Hold Animal weighing Checking Sorting Rechargeable battery RS232 RS485(optional) Printer(optional) Bluetooth(optional) Zigbee(optional)

✓ Dimensions

- ◆ Unit (mm)

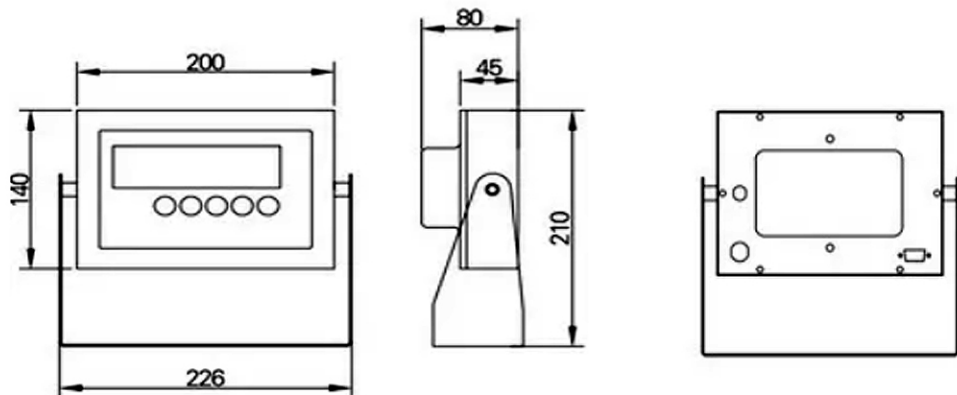

European standard product
Manufactured in China

Distributor

LOCOSC NINGBO PRECISION TECHNOLOGY CO., LTD